



BILL50M

AUTOMATIONS FOR SWINGING GATES LINEAR TELESCOPIC OPERATOR

personalised release key
up to 4.5 m



CONTROL PANELS:

- BILL50M — BRAINY HEADY p.112 p.113
- BILL50ML — BRAINY HEADY p.112 p.113




230 Vac


- Irreversible 230 Vac electromechanical geared motor with easy access release from above
- Neat design and size, particularly suited to forged iron gates
- Easy and quick to install due to compact size and installation dimensions

- Worm protected by a scraper ring and stainless steel stem, suitable for use in dusty and sandy environments or where there are aggressive atmospheric agents.
- Available in right or left version
- **BILL50ML version for large doors and confined installation dimensions**

MADE IN ITALY



B.SR
9819310
Multiposition brackets for one operator BILL50M/L.



BILL50.CO
9253002
Telescopic stem cover accessory for models BILL50M.



DU.V96
9765035
12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/external release.



DU.V90
9765030
12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/external release.



DU.9990
9623010
Covering plate for DU.V90.



E.LOCK
9765001
230 Vac vertical electric lock, supplied with counterplate.








E.LOCKSE
9765002
Extended cylinder for E.LOCK electric lock. It allows to unlock gates up to 55mm-thick from the outside.



ID.TA
9846019
Warning board.



ESA BASIC
9176108
System that reduces the electrical energy consumption.

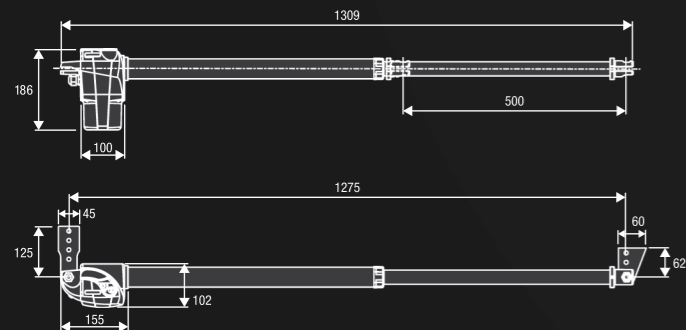


MEASURES

	A	B
BILL50M	180-250	180-250
BILL50ML	120-200	120-200

COMPLETE KITS

- **KBILL50M** 9592191
- 2 **BILL50M** 230 Vac Operators
- 1 **HEADY** 230 Vac control unit with integrated receiver
- 1 **PUPILLA.F** Pair of photocells
- 1 **LAMPI.LED** 230 Vac Led flashing light with built-in aerial
- 1 **TOKEY** Metal key selector
- 1 **TO.GO2WV** 433.92 MHz Transmitter

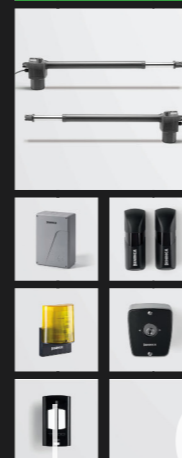

TECHNICAL DATA

	BILL50M	BILL50ML
Code	9592102 (R) / 9592103 (L)	9592104 (R) / 9592105 (L)
Power supply	230 Vac (50-60Hz)	230 Vac (50-60Hz)
Motor supply	230 Vac	230 Vac
Max absorbed current	1.1 A	1.2 A
Max Thrust	2800 N	3100 N
Opening time	21"	32"
Operation cycle	30%	30%
Standard stroke	500 mm	500 mm
Max stroke	520 mm	520 mm
Protection level	IP54	IP54
Operating temperature	-20°C /+50°C	-20°C /+50°C
Leaf max dimension	4.5 m	4.5 m
Weight	6.3 kg	6.3 kg

Items no. per pallet
Kits no. per pallet

37

60

09133648641

60

21

www.Securitykala.ir

03191003037

09133648641